


FURUTECH

PURE TRANSMISSION



Alpha Series Balance Audio Bulk Cable

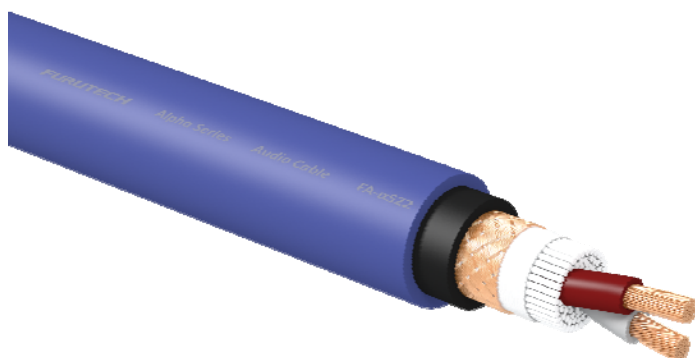

FA-αS22 (50M/Reel)

Furutech's α (Alpha) OCC is one of a select few of conductors that Furutech engineers have found to excel in sound reproduction. α (Alpha) OCC is made with high-purity oxygen-free copper using a special casting process. Unlike regular OFC, almost all of the impurities of this high-purity OCC have been removed at the micron level through a special casting process unique to Furutech.

Construction and Material

Item		FA-αS22
Conductor	Material	α(Alpha) OCC
	Construction (pcs / mm)	60pcs / ψ 0.18 mm
Insulation	Material	Audio grade PP (Red 、 White)
	Diameter (mm)	2.6
Twisting	Method	2 Cores Twisted Together
Filler	Material	Audio grade damping cotton
Barrier Layer	Material	Stabilizer Paper Tape (Wrap)
Shield	Material	ψ 0.12mmα (Alpha) Conductor wire braid
Inner Sheath	Material	Audio grade flexible PVC (Black) Incorporating damping carbon particles

	Diameter (mm)	7.0
Sheath	Material	Audio grade flexible PVC (Purple Blue)
	Nom. Thickness (mm)	1.0
Overall Diameter Approx. (mm)		9.0

Electrical Properties

Item	Specification	Test Method
Max. Conductor Resistance Ω / km	13.2	JISC3005 6 20°C
Min. Insulation Resistance M Ω ·km	>100	JISC3005 9.1 20°C
CAPACITANCE PF/M	84.1	at 1KHz
IMPEDANCE Ω	37.7	at 10 MHz
INDUCTANCE uH/M	1.55	at 1KHz
Dielectric Strength V / 1 min.	AC 1000	JISC3005 8

Cable Construction image:



Make a More Powerful Connection with Furutech!
 FURUTECH CO., LTD • service@furutech.com • www.furutech.com

Product name	Product Introduction	JAN CODE
FA- α S22-50	Balance Audio Bulk Cable	